




Av. Eduardo Madero 2250
Del Viso, Bs As, Argentina.

+54 (02320) 400 989

comunitel@comunitelsa.com.ar

SPLITTER CONECTORIZADO 1x8 SC/APC

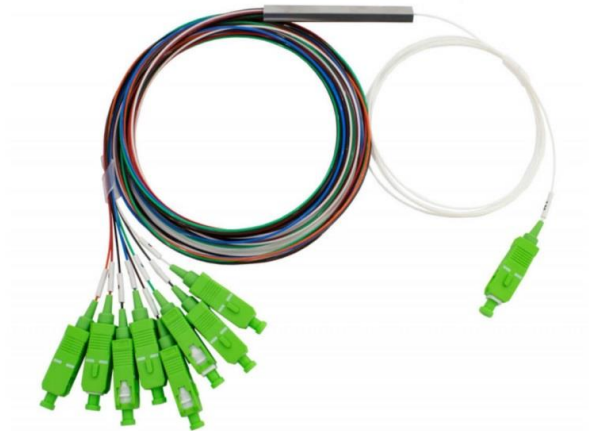

Features

- Small size and Achieve 0.9mm loose tube fiber optic multi-channel direct output without splitter;
- SC adapter interface default, can change interface type by the demand of customer;
- Satisfy with industry standards YD/T893 and YD/T1117;
- Installed in the cable connector box;
- Installed in the module box;
- Installed in the distribution box.

TYPE	1*8	
Fiber Type	9/125 um SMF-28e or customer appoint	
Operating Wavelength(nm)	1260 ~ 1650	
Insertion Loss(dB)	Typical	10.3
	Max	10.8
Loss Uniformity(dB)	Max	1
	Max	0.3
Polarisation Dependent Loss(dB)	Max	0.3
Directivity(dB)	≥55	
Return Loss (dB)	UPC:50 APC:55	
Operating Temperature (°C)	-40 ~ +85	Storage Temperature (°C)