




📍 Av. Eduardo Madero 2250
Del Viso, Bs As, Argentina.

☎ +54 (02320) 400 989

✉ comunitel@comunitelsa.com.ar

SPLITTER CONECTORIZADO 1x4 SC/APC

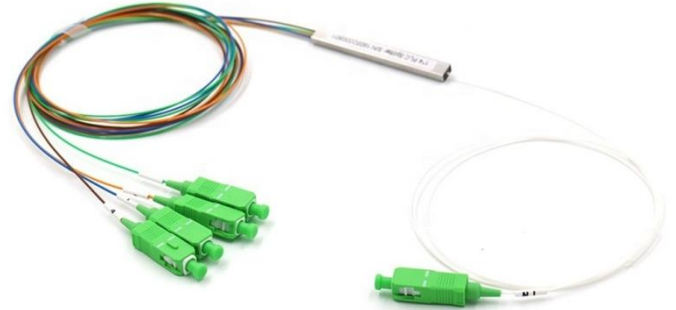

Features

- Small size and aesthetic appearance;
- SC adapter interface default, can change interface type;
- By the demand of customer;
- Installation quick, reliable performance, stability;
- Satisfy with industry standards YD/T893 and YD/T1117.

Applications

- Installed in 19" standard rack;
- Equipment to be installed is a cable transfer box when the fiber branches in home;
- Equipment to be installed is a customized box when the fiber branches in home.



Av. Eduardo Madero 2250
Del Viso, Bs As, Argentina.

+54 (02320) 400 989

comunitel@comunitelsa.com.ar

Performance Specifications

TYPE	1*4	
Fiber Type	9/125 um SMF-28e or customer appoint	
Operating Wavelength(nm)	1260 ~ 1650	
Insertion Loss(dB)	Typical	6.8
	Max	7.5
Loss Uniformity(dB)	Max	0.7
Polarisation Dependent Loss(dB)	Max	0.2
Directivity(dB)	≥55	
Return Loss (dB)	UPC:50 APC:55	
Operating Temperature (°C)	-40 ~ +85	Storage Temperature (°C)