




Av. Eduardo Madero 2250  
Del Viso, Bs As, Argentina.

+54 (02320) 400 989

comunitel@comunitelsa.com.ar

# ACOPLADOR SC/APC

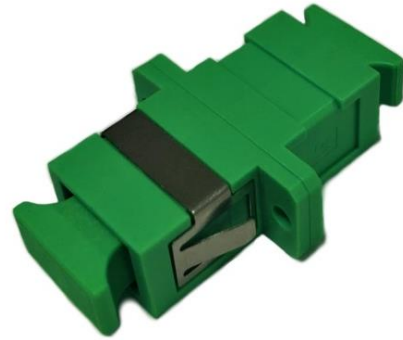

## Features

- Excellent changeability and directivity
- 100% optic test (insertion loss)
- Ceramic and phosphor bronze sleeve tube optional
- Accurate external size

## Application

- Fiber optic transmission system
- CATV networks
- Testing/Masurement Instruments
- Fiber distribution frame, Mounts in Fiber
- Optic Wall Mount and Rack Mount Cabi- nets

## Specification

Polish Type	Insertion Loss (dB)	Mating Durability (500 Cycles) (dB)	Temperature Stability (dB)	Operating Temperature (°C)	Storage Temperature (°C)	Withdrawal Force (g/f)
APC	≤0.20	≤0.20	≤0.30	-40~+80	-40~+85	200-600