




Av. Eduardo Madero 2250
Del Viso, Bs As, Argentina.

+54 (02320) 400 989

comunitel@comunitelsa.com.ar

PATCHCORD SC/APC – SC/APC MONOMODO SIMPLE 1.5 MTS

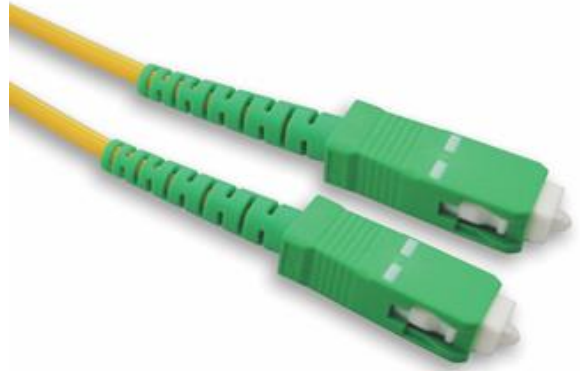

Features

- All ceramic ferrules for maximum optical and mechanical performance.
- All patch cords are 100% optically inspected and tested.
- Individually labeled with unique ID for traceability.
- Precision end-face geometry testing.
- High temperature stability.

Application

- CATV
- Telecommunication networks
- Local area networks (LAN)
- Data processing networks
- Test equipment
- Premise installations
- Wide area networks (WAN)



Av. Eduardo Madero 2250
Del Viso, Bs As, Argentina.

+54 (02320) 400 989

comunitel@comunitelsa.com.ar

Specifications

	Single mode	Multimode
Insertion Loss	Typical ≤ 0.2 dB, Maximum ≤ 0.3 dB	≤ 0.25 dB
Return Loss	≥ 50 dB (PC) ≥ 60 dB (APC)	
Repeatability	≤ 0.1	
Durability	≤ 0.2 dB typical change, 1000 matings	
Interchangeability	≤ 0.2 dB	
Tensile strength	> 70 N	
Operating Temperature	-20 to + 70°C	-20 to + 70°C